



HRV • H400-Fi-N



At the heart of buildings

Light Commercial

430 CFM at 0.2 in.w.g

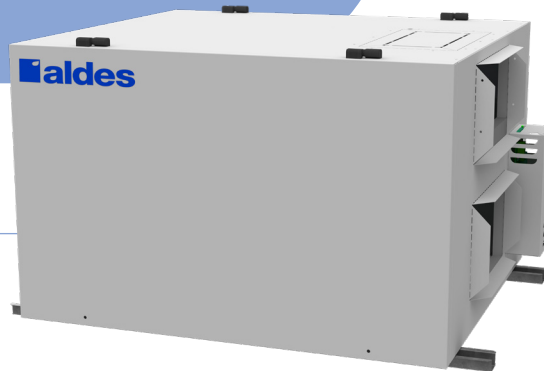

Polypropylene

PRODUCT DESCRIPTION

The H400-Fi-N heat recovery ventilator provides up to 430 CFM of fresh air. Equipped with Aldes' AHRI-certified core, it delivers reliable performance and energy savings across all climate zones. The unit is designed for versatile indoor installation and easy maintenance.

TECHNICAL INFORMATION



Plate Exchanger

Material: Polypropylene



Casing (Standard)

Material: Painted galvanized steel 22GA
Insulation: 1" (25 mm) Fiberglass with FSK
Drain Connection: Ø 1/2" (Ø 13 mm)
Duct Connections: 8" x 10" (203 mm x 254 mm)
Width: 30-1/2" (762 mm)
Height: 21-3/16" (538 mm)
Depth: 23" (584 mm)
Weight: 103 lb. (47 kg);
113 lb. (51 kg) with recirculation
Shipping Weight: 156 lb. (71 kg);
166 lb. (75 kg) with recirculation



Mounting

Supplied with base rails. Support rods not included



Electrical Requirements

120VAC, 60Hz, 349W, FLA 2.73A, MOP 15A
Terminal block for direct wiring to the building's electrical system. Fused disconnect not included



Filters

Aluminium filters (standard) (No. 300607025)
Optional MERV 8 (No. 300607046)
and MERV 13 filters available (No. 300607040)



Blowers

Two backward-inclined motorized impeller, direct-drive PSC, variable speed, external rotor



Frost Control

Cycles controlled by a temperature sensor when outdoor temperatures fall below 14°F (-10°C)
Standard: Exhaust Defrost
Optional: Recirculation Defrost (No. 300200005)

Sound data available on request

WALL CONTROLS

Low-voltage dry contact (24 VAC) to synchronize with the heating/cooling system. For more details, refer to the wall control spec sheets.



BACnet™ Interface
(No. 300220235)



Digital Multifunction Control
(No. 200500242_FC)



LCD Electronic Multifunction Control
(No. 200500227)



20/40/60 Minute timer
(No. 200500228)



Speed control
(low/intermittent/high)
(No. 200500229)



Mode Control
(recirculation)
(No. 200500230)


Electrical Coil (optional)

An optional electrical coil is available for post heating. The electrical heater has its own power connection with a fused disconnect included. Can be paired with the light commercial units for optimized control. The electrical heater is self managed with an included thermistor.



No.	Power	Dimensions (in.)			Minimum airflow (CFM)	VAC-Ph	Current (A)
		W	H	D			
300200001	4 kW	10	8	6	167	240-1	16.67
300200002	8 kW	14	8	7	233	240-1	33.33
300200003	10 kW	20	8	6	333	240-1	41.67
300200004	12 kW	24	8	6	400	240-1	50.00

Power	Availability			
	H/E/HK/EK 400	H/E/HK/EK 650	H/E/HK/EK 1100	H/E/EK 1800
4 kW	•	•	•	•
8 kW		•	•	•
10 kW			•	•
12 kW				•

DIMENSIONS

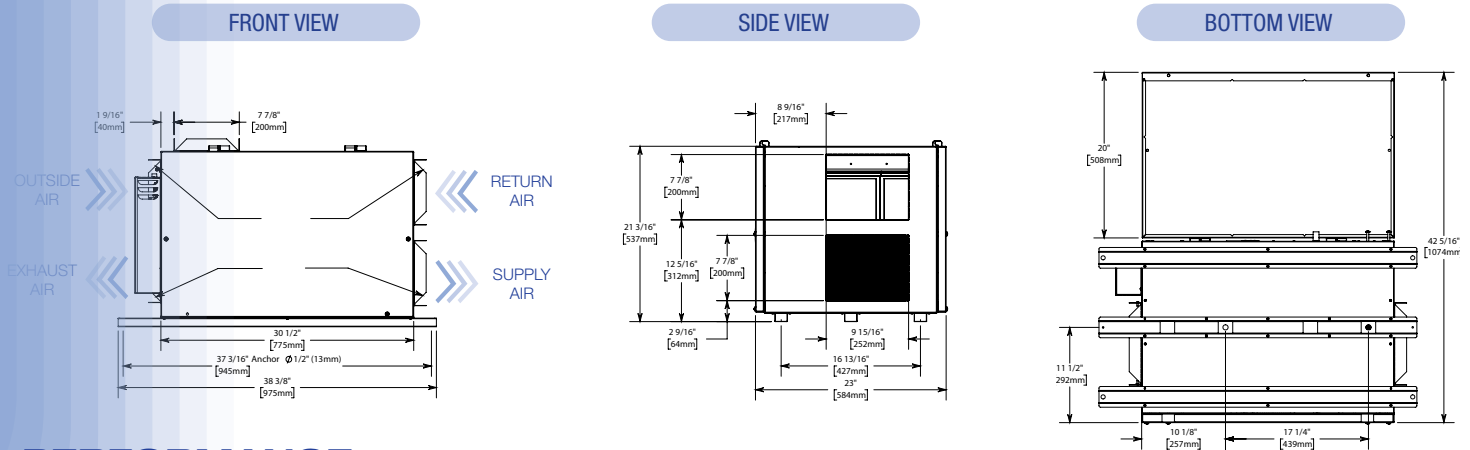

PERFORMANCE

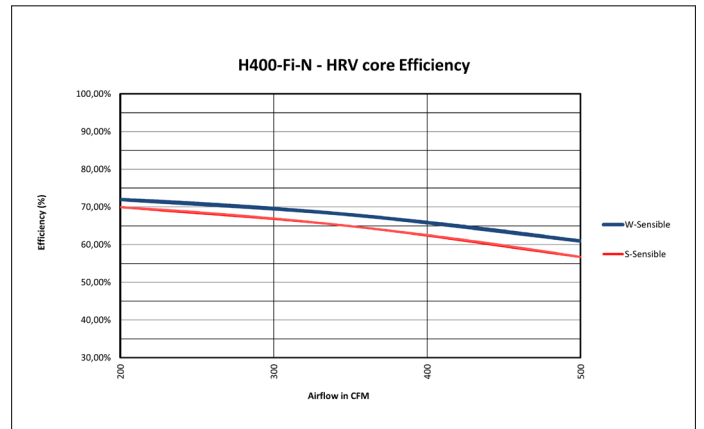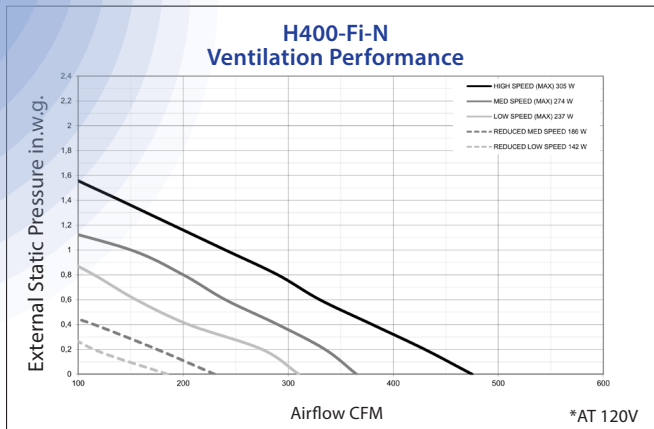

YOUR PROJECT :

Location : _____

Model # : _____

Quantity : _____

Submitted By : _____

Date : _____

Architect : _____

Engineer : _____

Contractor : _____

Comments : _____

For more information, contact your Aldes sales advisor, visit aldes-na.com, call 1.800.255.7749 or find us on

