



InspirAIR® FRESH

ERV

EK120-HFX-N

65 to 117 CFM at 0.4 in.w.g (ESP)



UNIT

CORE



PLATE EXCHANGER

Polymeric membrane counter-flow ERV

CASING (Standard)

Material: 24-gauge galvanized steel interior

Drain connections: none but can be added

Duct connections: 5" (127 mm)

Insulation: Polystyrene

Length: 32-1/8" (816 mm)

Height: 9-7/8" (251 mm)

Width: 23-1/8" (587 mm)

Weight: 53 lbs (24 kg)

Exhaust Damper: Gravity



MOUNTING (Standard)

Ceiling mount bracket included



ELECTRICAL & CONTROLS (Standard)

120 VAC, 60 HZ, 149 W, 2.41 A



FILTERS

(Standard)

Quantity: 1 supply, 1 exhaust

Supply Filter Type: Washable MERV 8 (No. 200607116)

Exhaust Filter Type: Washable Foam (No. 200607630)

(Optional: Sold Separately)

MERV 13 Filters (substitute on supply air circuit only)

(No. 200607117)



BLOWERS & MOTORS

Two motorized impellers (forward-curved)

Constant airflow system

EC motor



FROST PREVENTION/CONTROL


Automatic timed integral exhaust defrost: cycles are controlled by a temperature sensor when the outdoor temperature drops below 10.4°F (-12°C)

WARRANTY

Limited years on the cores and all covered components.

WALL CONTROLS


Low voltage dry contact (24VAC) for interlock with heating and cooling systems.



Digital Multifunction Control (No. 200500242_FC)



LCD Electronic Multifunction Control
(No. 200500227)




20/40/60 Minute Timer (No. 200500228)




Speed Control (Low/Intermittent/High)
(No. 200500229)



Mode Control (Recirculation) (No. 200500230)

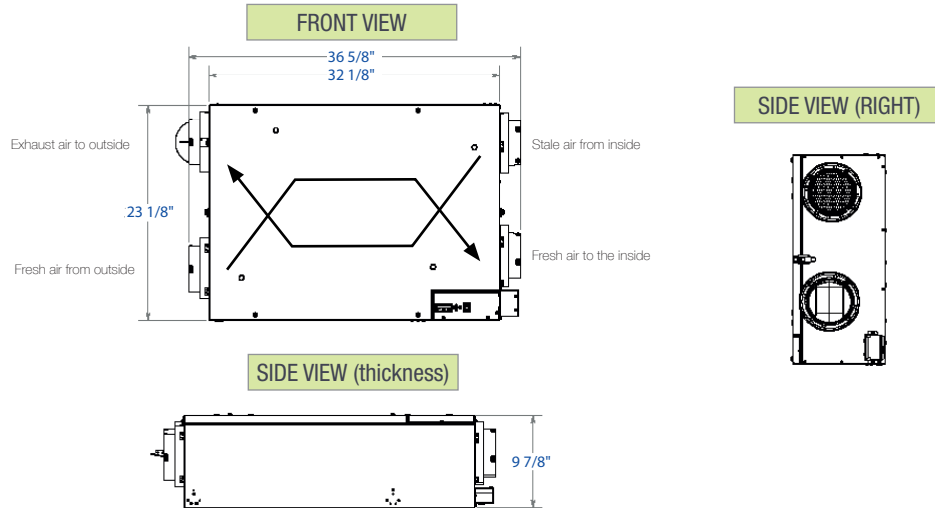

EK120-HFX-N: PERFORMANCE

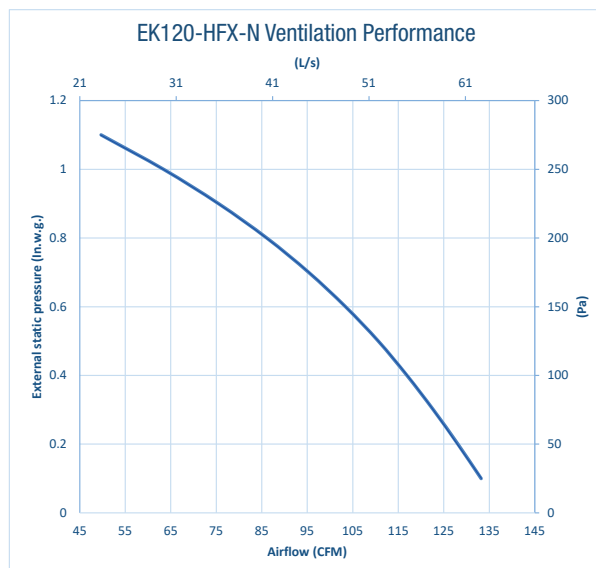

Thermal Performance – EK120-HFX-N								
Supply Temperature		Net Airflow		Power Consumed (w)	Sensible Recovery Efficiency	Adjusted Sensible Recovery Efficiency	Latent Recovery/ Moisture Transfer	Total Recovery Efficiency
°F	°C	CFM	L/s					
Heating								
32	0	50	23	27	76%	79%	73%	--
32	0	64	30	33	75%	78%	72%	--
14	-10	64	30	32	75%	78%	68%	--
Cooling								
95	35	52	24	31	--	--	79%	73%

Project:		Architect:	
Location:		Engineer:	
Model #:		Contractor:	
Quantity:		Comments:	
Submitted By:			
Date:			

For more information, contact your Aldes sales advisor, visit aldes-na.com, call 1.800.255.7749, or find us on



©2026 American ALDES Ventilation Corporation and ALDES Canada. All Rights Reserved. Reproduction or distribution, in whole or in part, of this document, in any form or by any means, without the express written consent of American ALDES Ventilation Corporation and/or ALDES Canada, is strictly prohibited. The information contained within this document is subject to change without prior written notice.

Corporation and/or ALDES Canada, is strictly prohibited. The information contained within this document is subject to change without prior written notice.

