



CAPACITY

- Airflow: 6000-9000 CFM
- VRF combination 16 to 20 tons
- Refrigerant type : R410a, R32 and R454-B available
- Tested according to AHRI 410

AIR CONDITIONING/HEATING (Standard)

- Combination DX evaporator (connection with VRF unit)
- DX evaporator connection: liquid (1/2"), gas (1 1/8")
- Economizer feature with free cooling available

AUXILIARY HEATING OPTIONS

Supplemental electric heating coil with SCR modulation (50 to 70 kW)

Indirect gas-fired furnace (350 MBH or 600 MBH)

- Indirect-fire, natural gas
- SS409 steel tube
- 10:1 modulation
- 81% efficiency
- Flame detection switches

CASING (Standard)

- Double-wall enclosure
- 22-gauge galvanized steel
- White pre-painted steel exterior finish
- Access doors with quarter-turn locks
- 18-gauge galvanized steel drain pan
- Drain connections: 1" (25 mm) NPT
- Mistop component to manage possible extra condensation
- Insulation: 2" (51 mm)
- Exhaust and supply weather hoods with bird screens
- Economizer section with motorized, airtight insulated aluminum dampers for fresh, exhaust, and mixed air.

MOUNTING

- Standard platform (Standard)
- 14-inch 18-gauge steel roof curb (Option)

product code : RC-RTU-20T-01

WARRANTY

- Components covered for 2 years
- Stainless steel exchanger covered 10 years according to OEM standard policies

COMPONENTS INSTALLED AND PRE-WIRED AT THE FACTORY

- Economizer section hood
- 50 to 70 kW electric coil with SCR modulation
- Exhaust fan and hood
- Fuse-less disconnect switch

FILTERS (Standard)

8 MERV 8 filters (16" x 20" x 2")

BLOWERS & MOTORS (Standard)

- Supply motorized impeller: 2 x 450 mm backwards inclined
- Exhaust motorized impeller: 315 mm backwards inclined
- Sealed, self-lubricating ball bearings
- High-efficiency, direct-drive EC motor

DX EVAPORATOR FROST PREVENTION/CONTROL


2 defrost options available:

- Fan speed reduction during defrost period (offtime defrost)
- Compensation by electric reheating


ELECTRICAL & CONTROLS (Standard)



- Available power supply 208V/3ph/60Hz; 460V/3ph/60Hz; 575V/3ph/60Hz
- Integrated Bacnet MSTP controller kit **product code: 699626**
- Fuse-less disconnect switch (NEMA 4)
- 24V transformer for controls
- Single point of electrical connection
- Rooftop unit with connection capabilities to Daikin, Samsung, Mitsubishi or other third-party VRFs.*

*Contact your local representative

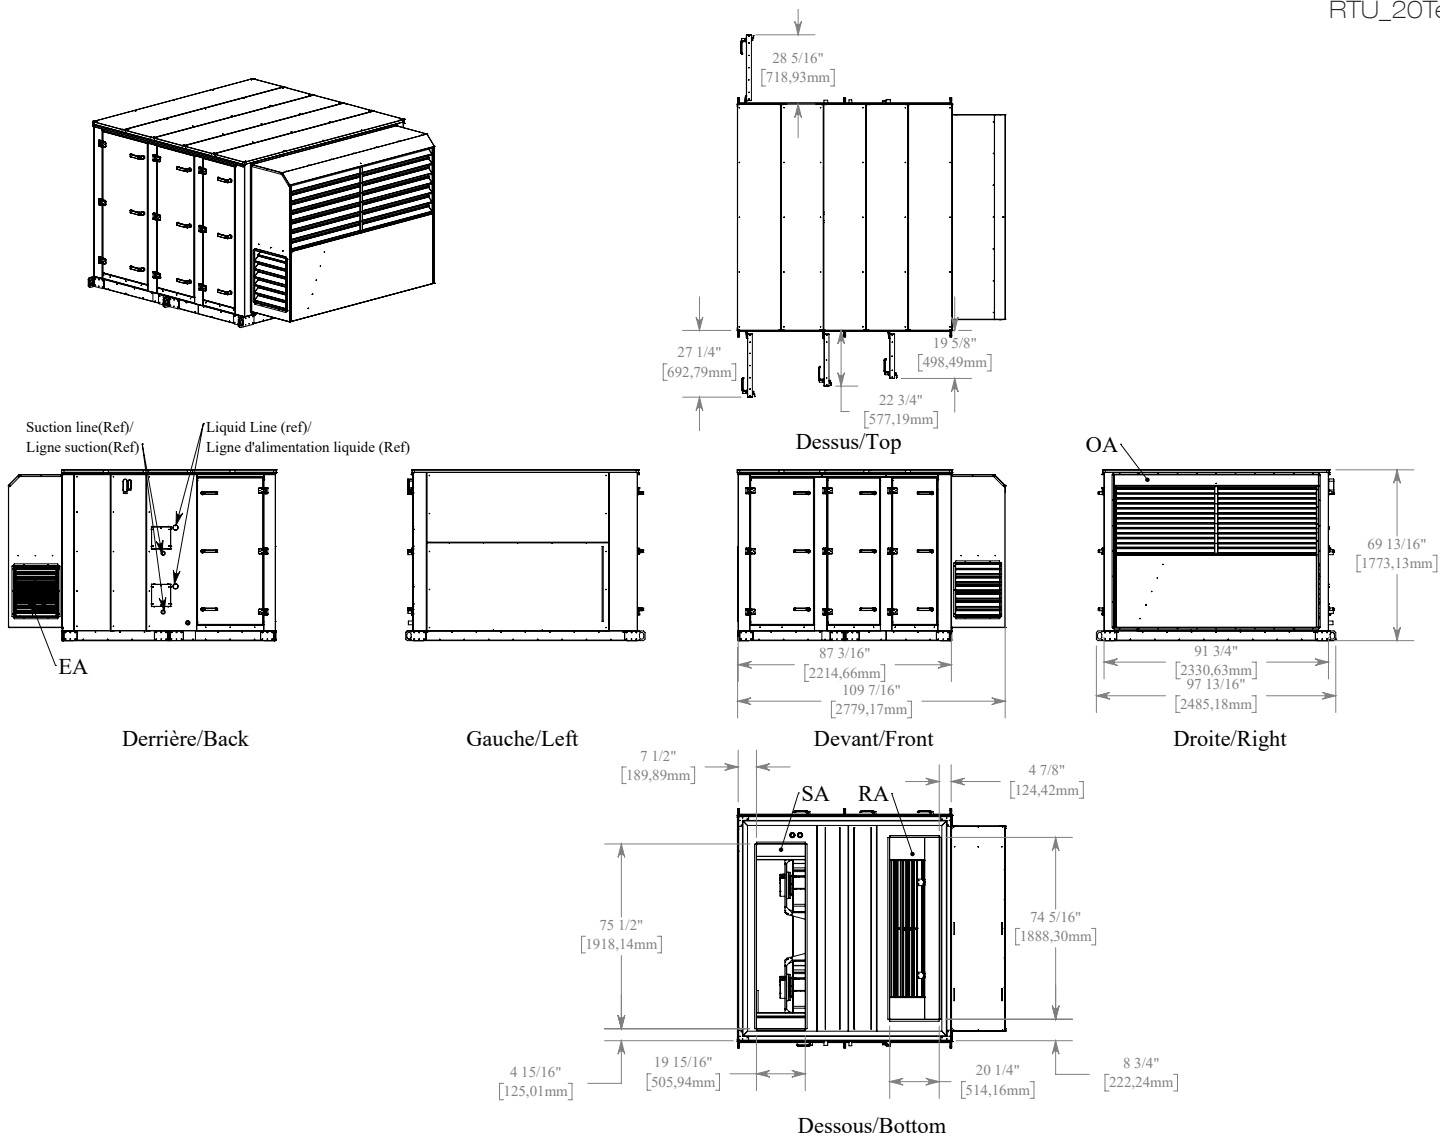


RTU_20Te : Dimensions (Standard - Inches)

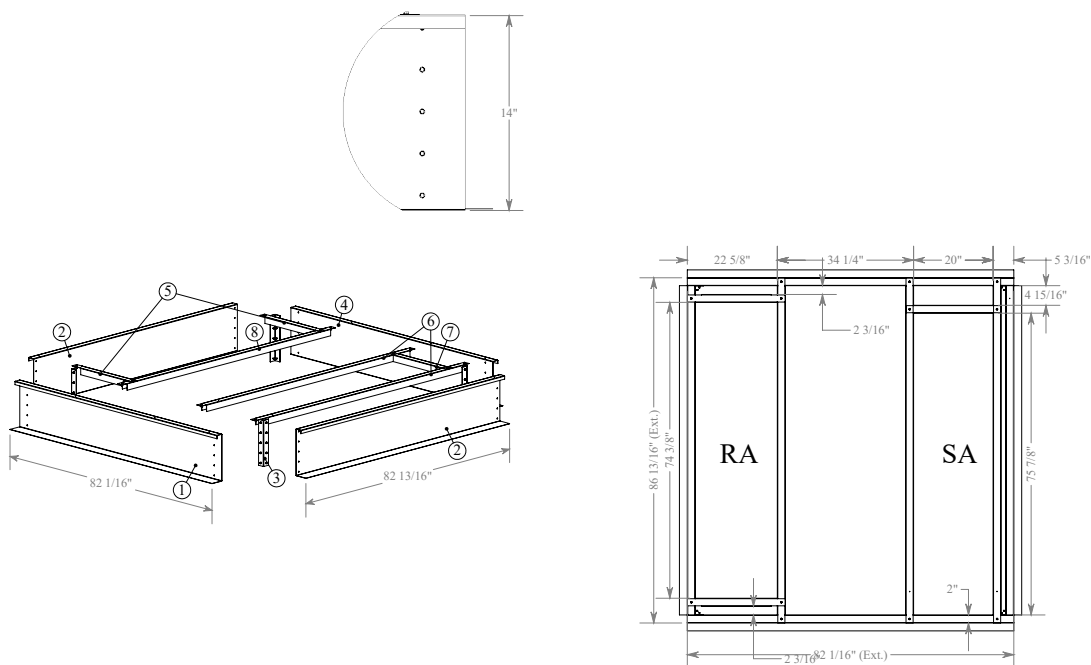


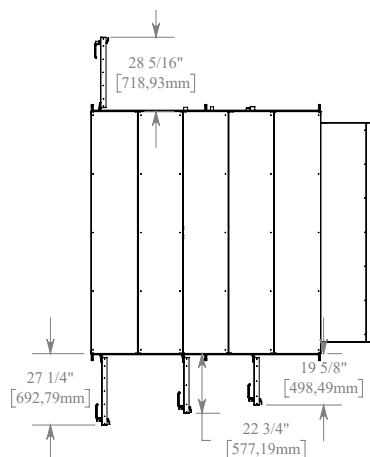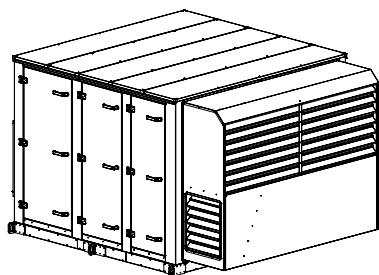


Dessus/Top

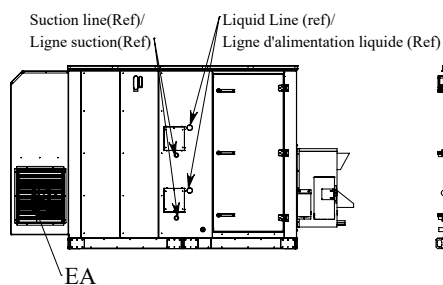


Derrière/Back




Gauche/Left




Devant/Front

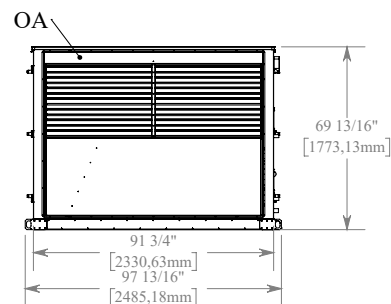


Droite/Right

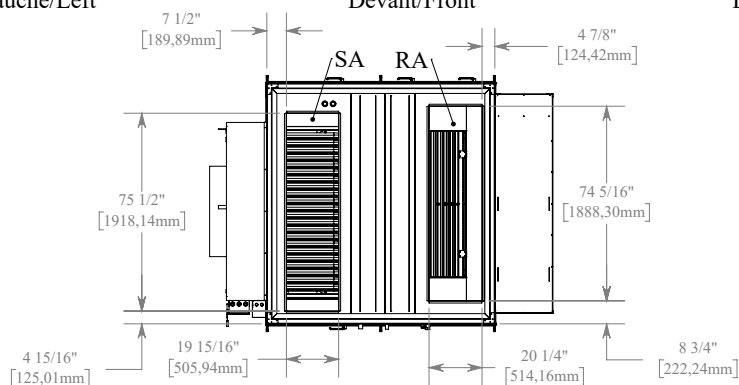

Dessous/Bottom

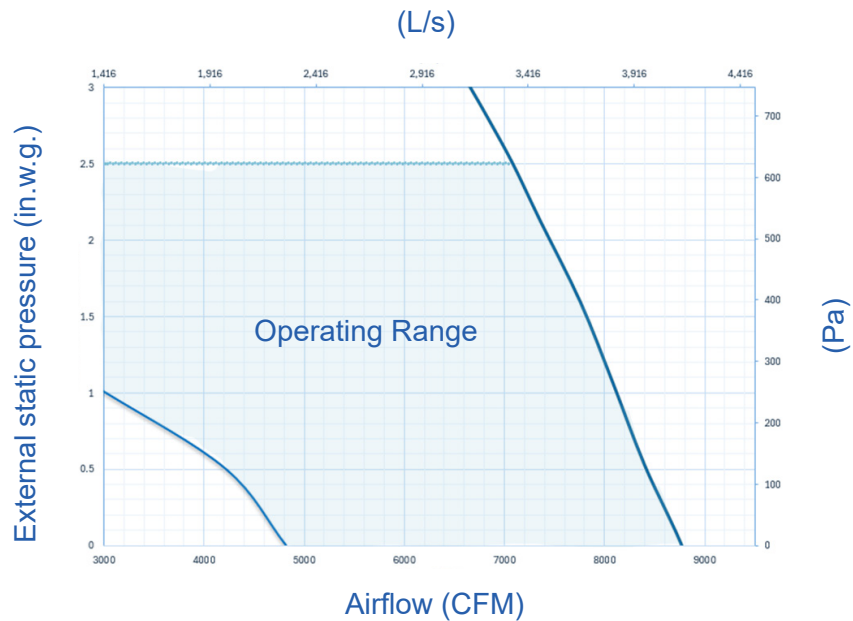

RTU_20Te : Configuration and Weight

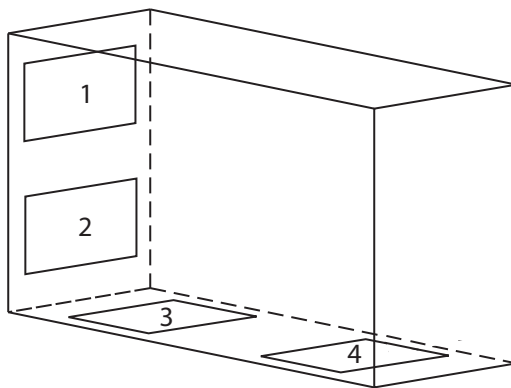

LEGEND	
1	Fresh air intake (SA)
2	Exhaust air (EA)
3	Exhaust air return (RA)
4	Fresh air distribution (SA)

RTU WEIGHT		
Unit Weight	2862 lb	
Shipping Weight	3022 lb	
Furnace Option		
Option 1 (350 MBH)	Unit Weight	3099 lb
	Shipping Weight	3259 lb
Option 2 (600 MBH)	Unit Weight	3337 lb
	Shipping Weight	3497 lb

For more information, contact your Aldes sales advisor, visit aldes-na.com, call 1.800.255.7749, or find us on



©2026 American ALDES Ventilation Corporation and ALDES Canada. All Rights Reserved. Reproduction or distribution, in whole or in part, of this document, in any form or by any means, without the express written consent of American ALDES Ventilation

Corporation and/or ALDES Canada, is strictly prohibited. The information contained within this document is subject to change without prior written notice.

