

aldes



PLATE EXCHANGER

High-efficiency polymeric membrane counter-flow ERV

CASING (Standard)

Material: 24-gauge galvanized steel
Drain connections: optional
Duct connections: 5" (127 mm)
Insulation: EPS molded polystyrene
Length: 23" (584.2 mm)
Height: 19" (482.6 mm)
Width: 16" (406.4 mm)
Weight: 49 lb (22 kg)
Exhaust Damper: Closed by gravity
Fresh air Damper: Motorized
Swivel ports for horizontal, vertical, oblique or mixed installations.



MOUNTING

Mounting chains included
Wall mounting optional (P/N 699921)



ELECTRICAL SPECIFICATIONS

120 V, 60 Hz, 145 W, 2.46 A



FILTERS

(Standard)
Quantity:
2 washable MERV 6 filters (P/N 699771)
Optional filter types: MERV 8 (P/N 699772),
MERV 13 (P/N 699881)

InspirAIR® ELITE

ERV

EK150-TQX

154 CFM at 0.4 in.w.g



UNIT



CORE



PATENT PENDING



BLOWERS & MOTORS

Two motorized impellers (backwards inclined)
Quick-connect motors for easy and efficient maintenance
EC motor



DEFROST

Automatic Programmed Recirculation: Cycles are controlled by a temperature sensor when the outside temperature drops below 17.6°F (-8°C).

WARRANTY

Limited 5 years on the cores and all covered components.

WALL

Low voltage dry contact (24VAC) for interlock with heating and cooling systems. For more details, please refer to the wall control specification sheets.



Digital Multifunction Control (P/N 611242-FC)



LCD Electronic Multifunction Control (P/N 611227)




20/40/60 Minute Timer (P/N 611228)



Speed Control (Low/Intermittent/High)
(P/N 611229)




Mode Control (Recirculation) (P/N 611230)

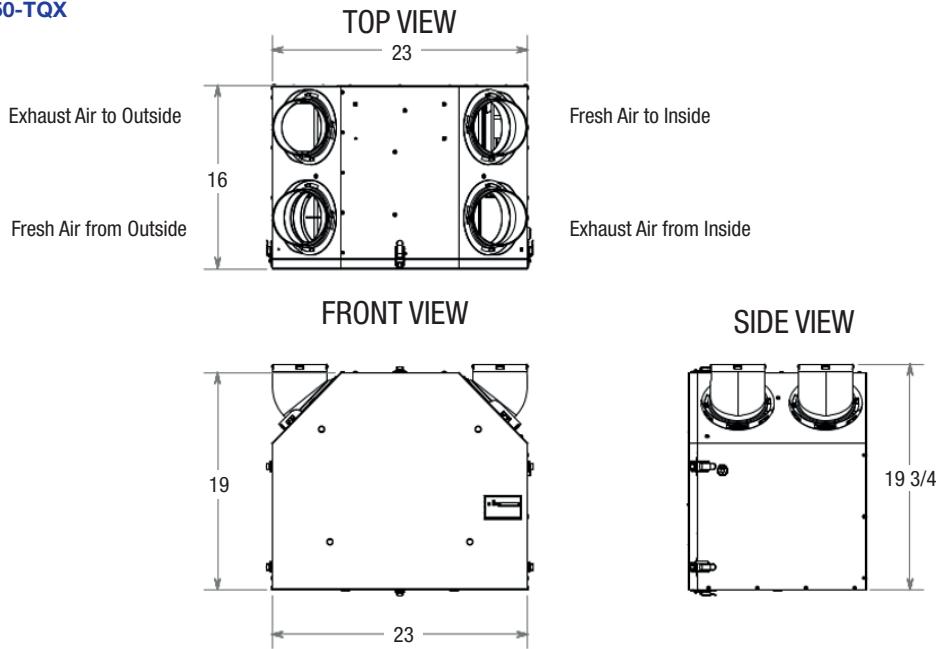

EK150-TQX: PERFORMANCE

EK150-TQX Ventilation Performance

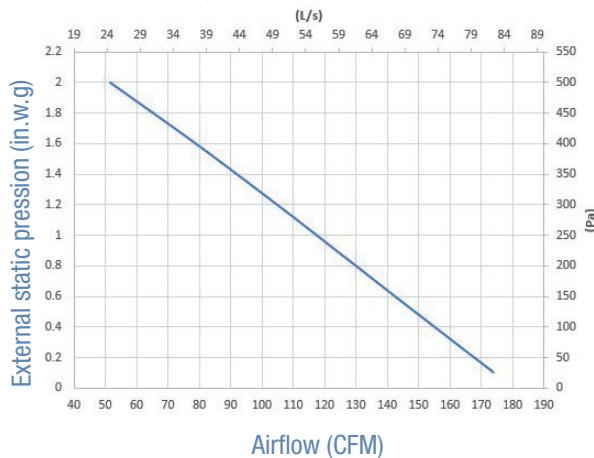

Thermal Performance – EK150-TQX								
Supply Temperature		Net Airflow		Power Consumed (w)	Sensible Recovery Efficiency	Adjusted Sensible Recovery Efficiency	Latent Recovery/ Moisture Transfer	Total Recovery Efficiency
°F	°C	CFM	L/s					
Heating								
32	0	50	23	23	83%	86%	74%	-
32	0	65	31	29	83%	86%	73%	-
-13	-25	67	31	50	75%	77%	71%	-
Cooling								
95	35	65	31	29	-	-	88%	83%

Project:	Architect:		
Location:	Engineer:		
Model #:	Contractor:		
Quantity:	Comments:		
Submitted By:			
Date:			

For more information, contact your Aldes sales advisor, visit aldes-na.com, call 1.800.255.7749, or find us on

©2026 American ALDES Ventilation Corporation and ALDES Canada. All Rights Reserved. Reproduction or distribution, in whole or in part, of this document, in any form or by any means, without the express written consent of American ALDES Ventilation

Corporation and/or ALDES Canada, is strictly prohibited. The information contained within this document is subject to change without prior written notice.

